




**ATT-6.5**

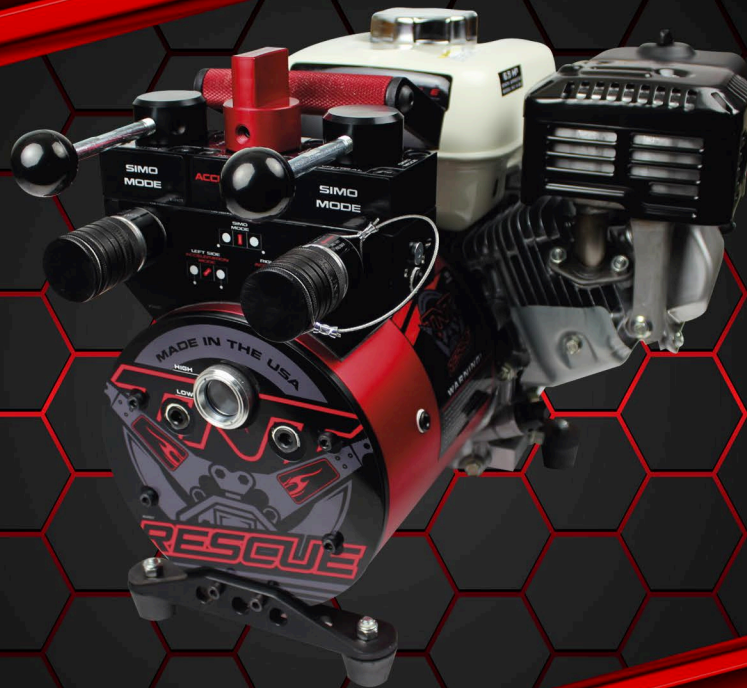

TECHNICAL SPECS	STANDARD	METRIC
MAX. WORKING PRESSURE	10,500 PSI	724 BAR
LENGTH	21,20 IN	538,5 MM
WIDTH	15,50 IN	393,7 MM
HEIGHT	15,00 IN	381 MM
WEIGHT	80,8 LBS	36,7 KG
MOTOR	HONDA GX 200 4 STROKE	
DISPLACEMENT	196,00 CC / 4,8 KW / 6,5 BHP	
FUEL TANK CAPACITY	0,95 US GALLON	3,6 LITER
APPROXIMATE RUN TIME	2 HOURS	
ENGINE OIL	SEE HONDA OWNER'S MANUAL	
HYDRAULIC PUMP	2 STAGE RADIAL PISTON OVER PISTON	
TOOL OPERATION	2 TOOL SIMULTANEOUS OPERATION	

TECHNICAL SPECS	STANDARD	METRIC
RESERVOIR CAPACITY	0,90 US GALLON	3,4 LITER
CERTIFIED TO NFPA 1936-2020	YES	
SIMULTANEOUS MODE	STANDARD	METRIC
1ST STAGE SETTING	3,200 PSI	220 BAR
1ST STAGE FLOW	245 CU IN/MIN	4,014.8 CC/MIN
2ND STAGE SETTING	10,500 PSI	724 BAR
2ND STAGE FLOW	85 CU IN/MIN	1,392.9 CC/MIN
ALTERNATING ACCELERATION MODE (PER TOOL)	STANDARD	METRIC
1ST STAGE SETTING	3,200 PSI	220 BAR
1ST STAGE FLOW	490 CU IN/MIN	8,029.6 CC/MIN
2ND STAGE SETTING	10,500 PSI	724 BAR
2ND STAGE FLOW	170 CU IN/MIN	2,785.8 CC/MIN

TNT RESCUE SYSTEMS INC.  
 2490 west Oak Street  
 Ashippun, WI 53003  
[www.TNTRESCUE.com](http://www.TNTRESCUE.com)

