




BT-6.5

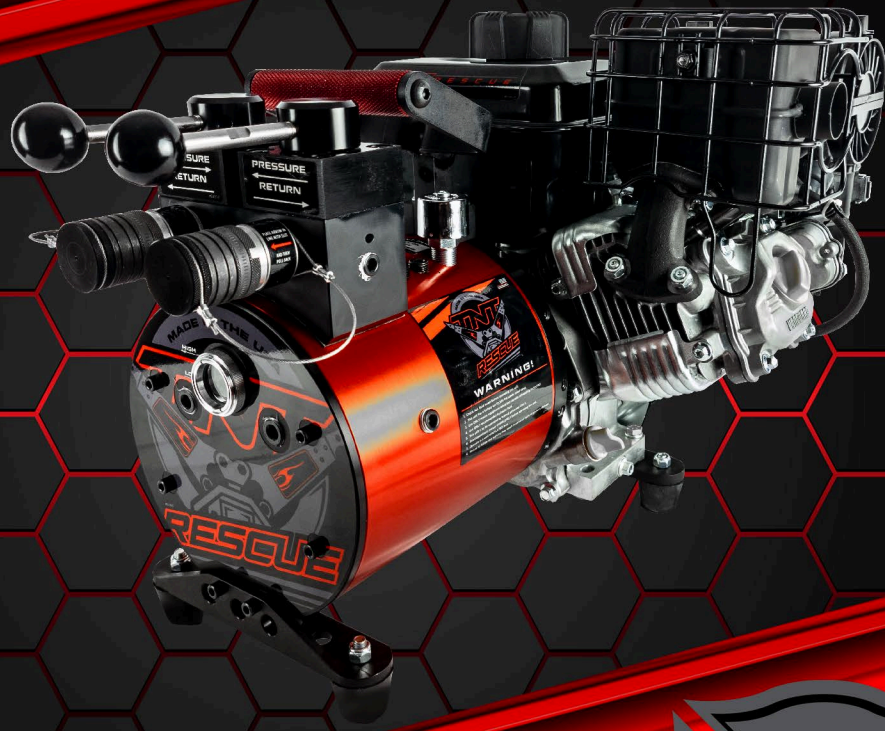

TECHNICAL SPECS	STANDARD	METRIC
MAX. WORKING PRESSURE	10,500 PSI	724 BAR
LENGTH	22,50 IN	571,5 MM
WIDTH	15,75 IN	400,1 MM
HEIGHT	17,00 IN	431,8 MM
WEIGHT	80,50 LBS	36,5 KG
MOTOR	VANGUARD 6.5 4 STROKE	
DISPLACEMENT	203 CC / 4,85 KW / 6,5 BHP	
FUEL TANK CAPACITY	0,95 US GALLON	3,2 LITER
APPROXIMATE RUN TIME	2 HOURS	
ENGINE OIL	SEE VANGUARD OWNER'S MANUAL	
HYDRAULIC PUMP	2 STAGE RADIAL PISTON OVER PISTON	

TECHNICAL SPECS	STANDARD	METRIC
TOOL OPERATION	2 TOOL SIMULTANEOUS OPERATION	
RESERVOIR CAPACITY	0,90 US GALLON	3,4 LITER
MFG. TO NFPA 1936-2020	YES	
SIMULTANEOUS MODE	STANDARD	METRIC
1ST STAGE SETTING	3,200 PSI	241 BAR
1ST STAGE FLOW	245 CU IN/MIN	4,014.8 CC/MIN
2ND STAGE SETTING	10,500 PSI	724 BAR
2ND STAGE FLOW	85 CU IN/MIN	1,392.9 CC/MIN

TNT RESCUE SYSTEMS INC.
 2490 west Oak Street
 Ashippun, WI 53003
www.TNTRESCUE.com

